


project video into air mid-air video display solution

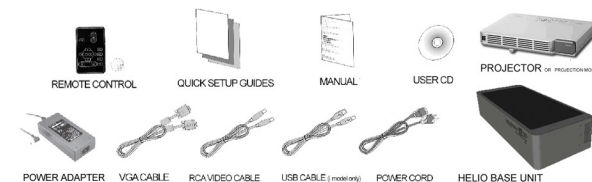

dimensions: 47.2" x 6.27" x 10.8"
[1198 x 159 x 278mm]

weight 35lbs [15.9kg]
power 90w (90v-240v)
phase 50-60Hz

sound 39 dB @ 2meters

anodized flat black aluminum chassis

black honeycomb cell structure

universal power 110 & 220

user serviceable pumps and ceramic disks (below)

new electronic control architecture

electronic fluid level meter

power cycle sync with projection source

configurable in one of three ways: up/side/down orientation*

remote control sync

remote trigger (option available upon request)

internal or external tank option

low consumption @ 50w (23.7w)



BOTTOM



TOP



SIDE

*NOTE: system ships with legs, can be removed for installation or kept (see setup depending on configuration). Legs add another 1" in height.

POWER SECTION LISTINGS: 2008



NOTE: The performance characteristics of this system may vary depending on the environment, product application, and operating conditions. Please refer to the manual for detailed specifications. This document is subject to change without notice. I02 Technology is not liable for any direct, indirect, incidental, consequential or other damages arising from the use of this system. Heliodisplay is a registered trademark of I02 Technology. All specifications found to be accurate at time of printing.